

OMIKRON TWIN

9950FTP250P68

EAN 4031582316810

Swivel caster, housing and plate steel-welded, zinc plated, blue passivated, sealed swivel bearing with dual purpose bearing and tapered roller bearing, threaded king pin and locking nut secured, grease nipple, wheel axle with nut, plate fitting. Wheel center made of cast iron, Tread: Polyurethane, casted, precision ball bearing



BETTER MOBILITY. BETTER LIFE.




Picture may differ from original product


Technical Data

Wheel diameter	250 mm
Wheel width	80 mm
Caster width	272 mm
Plate size	270 x 250 mm
Plate hole centers	230 x 210 mm
Plate hole	17 mm
Dome-Ø	250.5 mm
Offset	70 mm
Swivel Interference	421 mm
Overall height	365 mm
Temperature	- 10 / + 60 °C
Standard	EN 12533
Weight	54.441 kg
Swivel Radius	210.5 mm
Hardness of tread	Shore D 42
Load capacity (dynamic)	4320 kg
Load capacity (static)	8640 kg

Dimensions

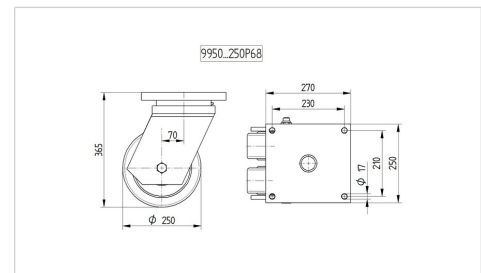

Structure & Mounting

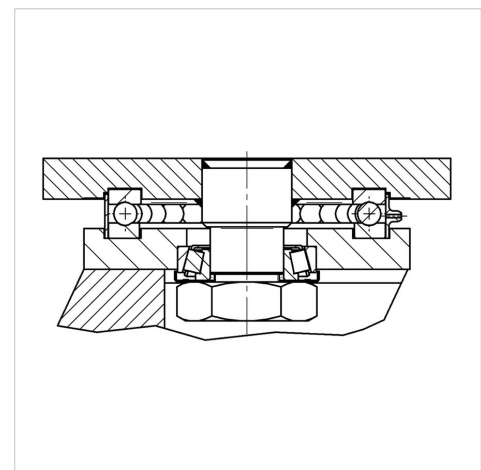

Advantages at a glance

Roll performance	● ● ● ● ○
Movement noise	● ● ● ○ ○
Attrition	● ● ● ● ○
Corrosion resistance	● ● ● ○ ○

OMIKRON TWIN

9950FTP250P68

EAN 4031582316810



BETTER MOBILITY. BETTER LIFE.

Structure & Mounting

